



Hydraulic Dock Leveler

FIPL-DL-191

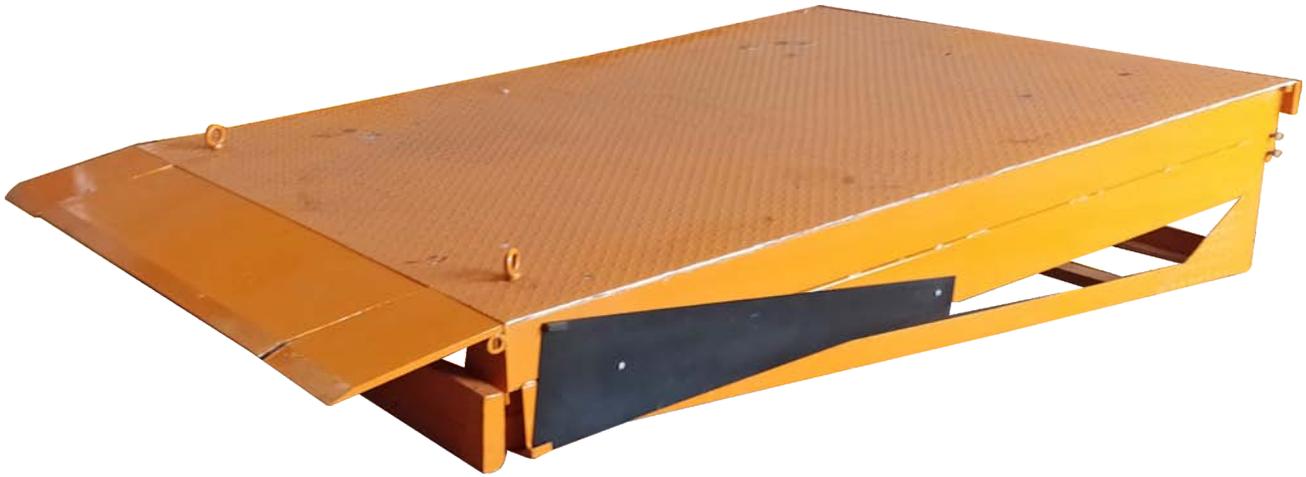


DOCK LENGTH	: L1	2730MM
DOCK WIDTH	: W1	2000MM
WORKING HEIGHT	: +H1 / -H2	+300 / -300
PIT LENGTH	: L	2790MM
PIT WIDTH	: W	2050MM
PIT HEIGHT	: H	605MM

ø75MM HOLE FOR WIRE/HOSE; IT'S LOCATION DEPENDS ON THE SIDE WHERE POWERPACK AND PANEL TO BE INSTALLED

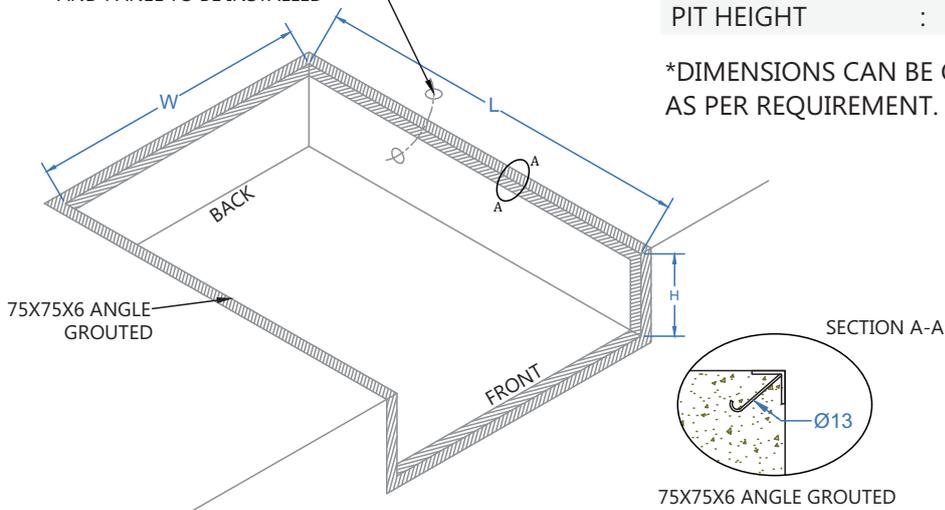

*DIMENSIONS CAN BE CUSTOMIZED AS PER REQUIREMENT.

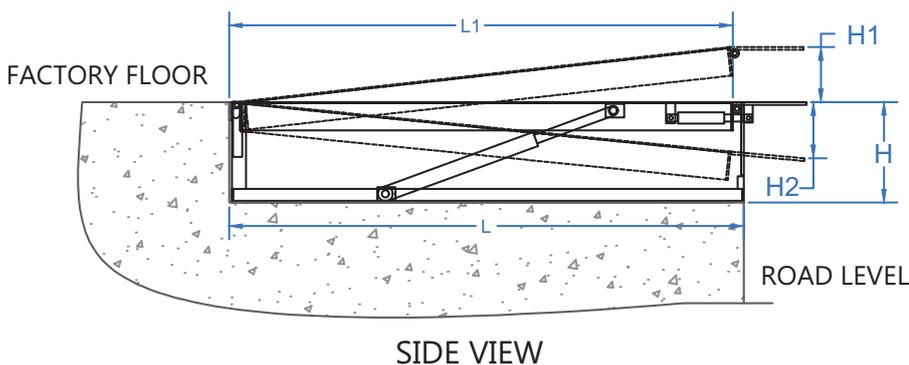

Hydraulic Dock Leveler

FIPL-DL-191



MODEL	FIPL-191	
Product Size		
Capacity (Kg)	6000 Kg / 8000 Kg / 10000 Kg / 12000 Kg	As per requirement
Platform Size (LxW) (mm)	2730 x 2000	As per requirement
Lip Size (LxW) (mm)	2000x400 (Three Parted)	As per requirement
Type	Single Button Operated / Four Button Operated	As per requirement
Lower Height (flushed in pit) (mm)	600	As per requirement
Working Range (mm)	+/- 300	As per requirement
Cylinders	One for Deck, One for Lip	As per requirement
Power Pack	1 - 1.5 HP	As per requirement
Motor	3 Phase	As per requirement
Features	<ul style="list-style-type: none">- Easy to bridge the gap between your factory floor and Vehicle floor.- Low power consumption.- Both side toe guards.- Perfect solution for warehouses, Industries, factories.- Rubber Bumpers at both side of Dock Leveler."	
*Tolerance in lifting and technical Specs.	+/- upto 20mm	

Note: There may be any specification/dimensional change. If these specifications are critical, the proposed application should be discussed.