
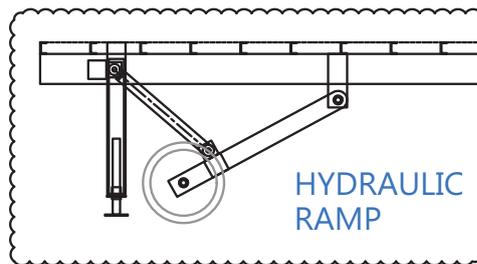
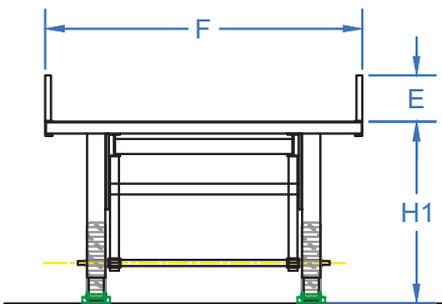


# Mobile Ramp

## FIPL-DR-192-HYDRAULIC RAMP

## FIPL-DR-193-MECHANICAL RAMP

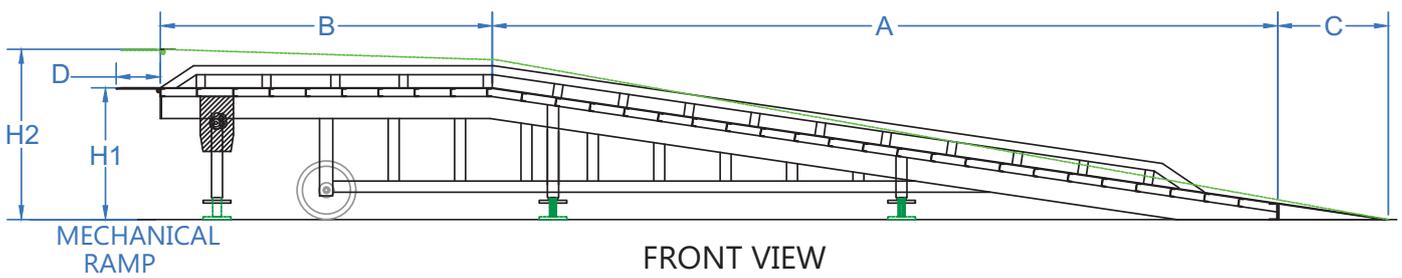

# Mobile Ramp

## FIPL-DR-192-HYDRAULIC RAMP

## FIPL-DR-193-MECHANICAL RAMP



### Additional Features:

1. Movable Ramp
2. Fix Ramp
3. Hand Pump
4. AC Motor
5. Hydraulic Lift Cylinder
6. Rubber Tyre Wheel
7. Floor Lock
9. CI Swivel Wheel
9. Flap Cylinder
10. Railing

MODEL		FIPL-DR-192	FIPL-DR-193
Capacity	Q	10 / 15 Ton	10 / 15 Ton
Ramp Length	A	7100 mm	7100 mm
Platform Length	B	3000 mm	3000 mm
Small Ramp Length	C	1000 mm	1000 mm
Flap Length	D	300 mm	300 mm
Railing Height	E	300 mm	300 mm
Ramp Width	F	2200 mm	2200 mm
Overall Length	G	11400 mm	11400 mm
Close Height	H1	1200 mm	1200 mm
Raised Height	H2	1700 mm	1600 mm
Operation		HYDRAULIC/ ELECTO -HYDRAULIC	MECHANICAL

### Features

- Mobile dock ramp can be applied on sundry occasions such as the position in the non-loading platform, not fixed load and unload location, narrow load and unload ground and soon.
- Mobile forklift truck and other transporting facilities can enter into the truck to carry on loading and unloading directly.
- Provided with manual hydraulic controls.
- Tires can be folded to lift off when the dock is in use and let down when you need to move the mobile dock.
- Easy and convenient to move and change the working location of the mobile dock by the manpower.

**Note:** There may be any specification/dimensional change. If these specifications are critical, the proposed application should be discussed.